



Sullair Performance Lubricant

SULLAIR SRF™ RS

Replacement Fluid for Oil Flooded Rotary Screw Compressors

SRF RS is a full synthetic air compressor fluid engineered with polyalphaolefin (PAO) base stocks and a robust additive system providing long service life, thermal stability and varnish resistance.



- Excellent seal and elastomer compatibility
- Lasts long – up to 8000 hours or one year
- Outstanding protection against rotor and bearing wear

Reliability at a competitive price

The advanced additive system coupled with the high-performance synthetic base oils in SRF RS promote maximum efficiency. A balance of corrosion and anti-wear protection help keep critical compressor components shielded from harmful contaminants.

FEATURES AND BENEFITS

Thermal Stability

Synthetic PAO base stocks and antioxidants slow oil oxidation and degradation at peak temperatures. This helps provide long life and varnish resistance for critical compressor components.

Low foaming and rapid air release

Helps improve lubrication film strength and reduce oil carryover. Low oil carryover reduces the amount of top-offs —saving you money and downtime.

Compatibility

Compatible with common seals and elastomers which helps reduce the risk of leaks while promoting a safe operating environment.

Comprehensive support


We stand ready with fluid professionals who can help with any fluid-related issues or questions. Our exclusive fluid analysis program thoroughly evaluates your compressor fluid and provides critical data including: lubricant performance history; drain intervals; and environmental conditions that may affect your fluid. Choosing the right fluid and testing it regularly can help you build an optimized preventive maintenance program designed to help maximize compressor productivity while minimizing downtime.

PRODUCT INFORMATION



PACKAGING	
Size	Part Number
5 Gallon Pail	1008-3466
1 Skid (32 – 5 Gallon Pails)	1008-3467

TYPICAL PROPERTIES		
Test	Units	Typical Result
Viscosity @ 40°C	cSt	46.0
Viscosity Index		150
Specific Gravity @ 15°C	g/cm ³	0.86
Flash Point	°F (°C)	465 (244)
Hours		8,000

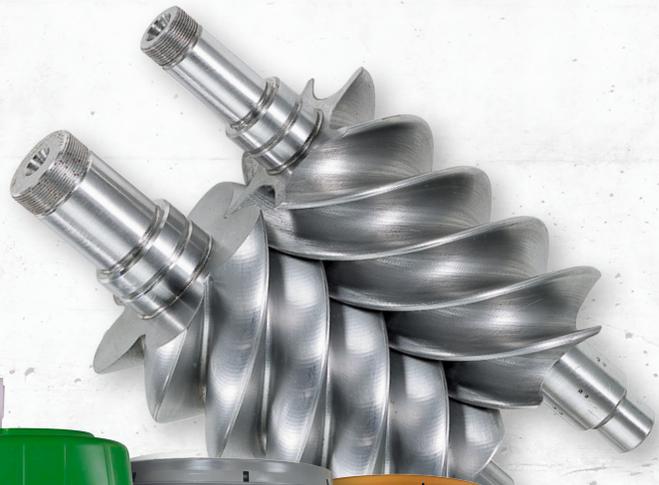

Note: Maintaining your Sullair Diamond Warranty requires the use of Genuine Sullube®.

THERE IS A FULL LINE OF SULLAIR LUBRICANTS FOR ALL OF YOUR ROTARY SCREW COMPRESSOR NEEDS.
FOR MORE INFORMATION, CONTACT YOUR LOCAL AUTHORIZED SULLAIR DISTRIBUTOR.